
Mini-Connector Three Pin

Specifications

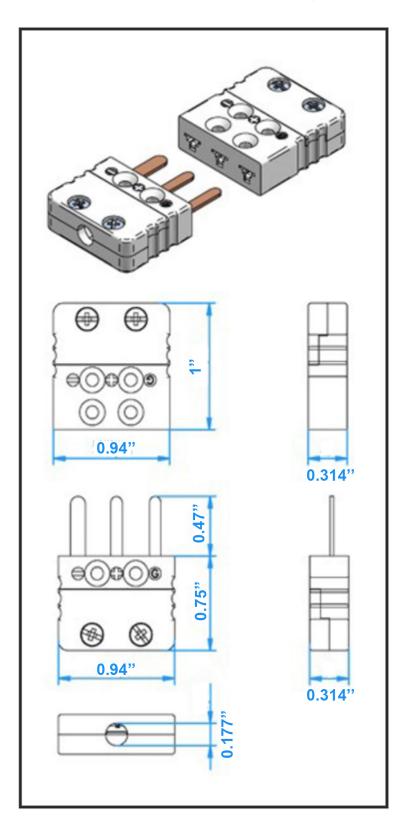

Part Numbers

- H116-U Male Three Pin Mini-Connector
- H126-U Female Three Pin Mini-Connector

Application

Connector for thermocouple and RTD circuits. Suited for small wires and mineral insulated cables. Third connection for ground or continuous shield connection or for three wire RTD's.

Construction

- Glass filled thermoplastic body with original thermocouple material pins and springloaded inserts.
- · Polarized pins ensure proper connection.
- Easy wire connection through sandwich construction.
- · Molded barriers prevent short circuit.
- Rugged one body design.

Wire size

- Accepts wires up to 0.023 inches.
- Maximum cable diameter 0.177 inches.

Temperature rating

200°C Max.



